
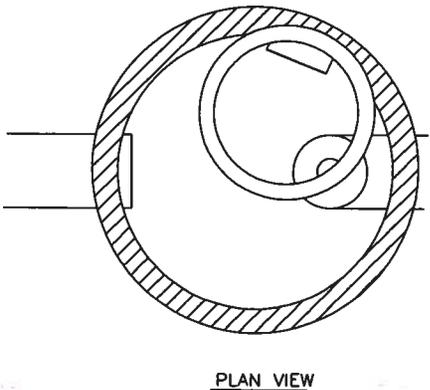
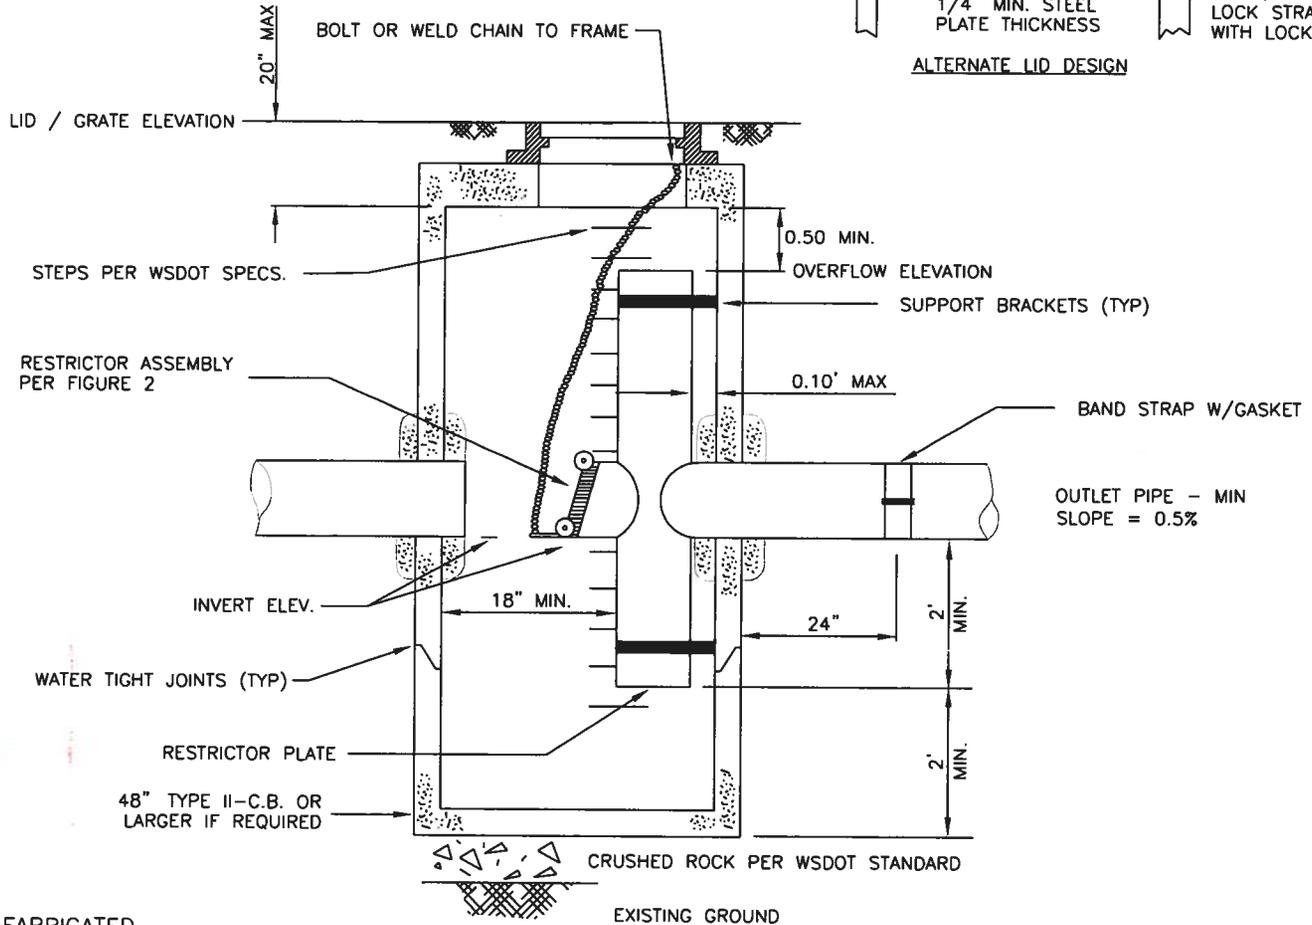


INSTALL C.B. FRAME
SO THAT (1) RESTRICTOR
DEVICE IS VISIBLE AT EDGE
OF OPENING AND (2)
DIRECTLY OVER LADDER.

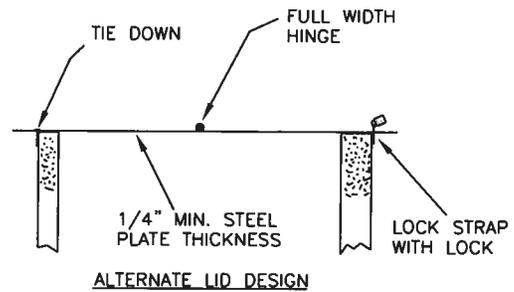

APPROVED
City of Oak Harbor
Engineering Dept.

Signature

6/18/06
Date

NOTES:



1. RESTRICTOR ASSEMBLY SHALL BE FABRICATED OF ALUMINUM. ALL METAL PARTS MUST BE MADE OF CORROSION RESISTANT MATERIALS.
2. INSTALL LOCKING FRAME AND GRATE OR FRAME AND LID. FRAME AND LID IS REQUIRED IF INSTALLATION IS NOT IN PAVED AREA OR IS NOT TO FUNCTION AS A CATCH BASIN.




City of
Oak Harbor
ENGINEERING DEPARTMENT
865 SE Barrington Drive
Oak Harbor, WA 98277

Restrictor Manhole

HASP ASSEMBLY FOR PADLOCK

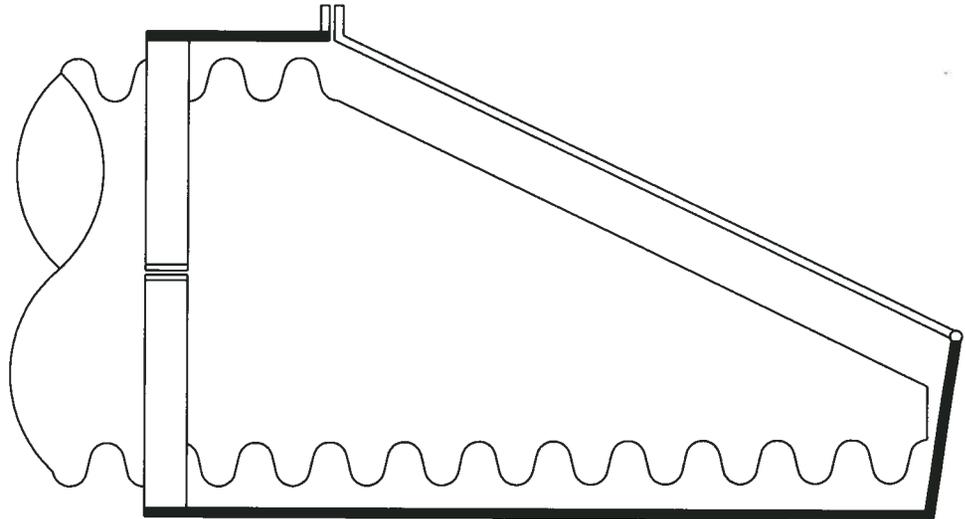

HASP ASSEMBLY:
CONSTRUCT OF 2" x 3/8" FLAT BAR
WITH 1/2" LOCK HOLE. PROVIDE
PADLOCK KEYED TO CITY MASTER KEY

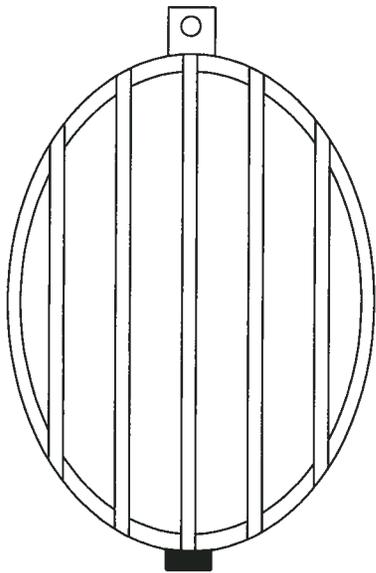

2" x 3/8" FLAT BAR FRAME

1/2" DIAMETER RODS

APPROVED
City of Oak Harbor
Engineering Dept.

Signature

6/8/06
Date

2" x 3/8" FLAT BAR WITH
HINGE (1/2" PIN MIN.)



City of
Oak Harbor
ENGINEERING DEPARTMENT
865 SE Barrington Drive
Oak Harbor, WA 98277

TRASHRACK