



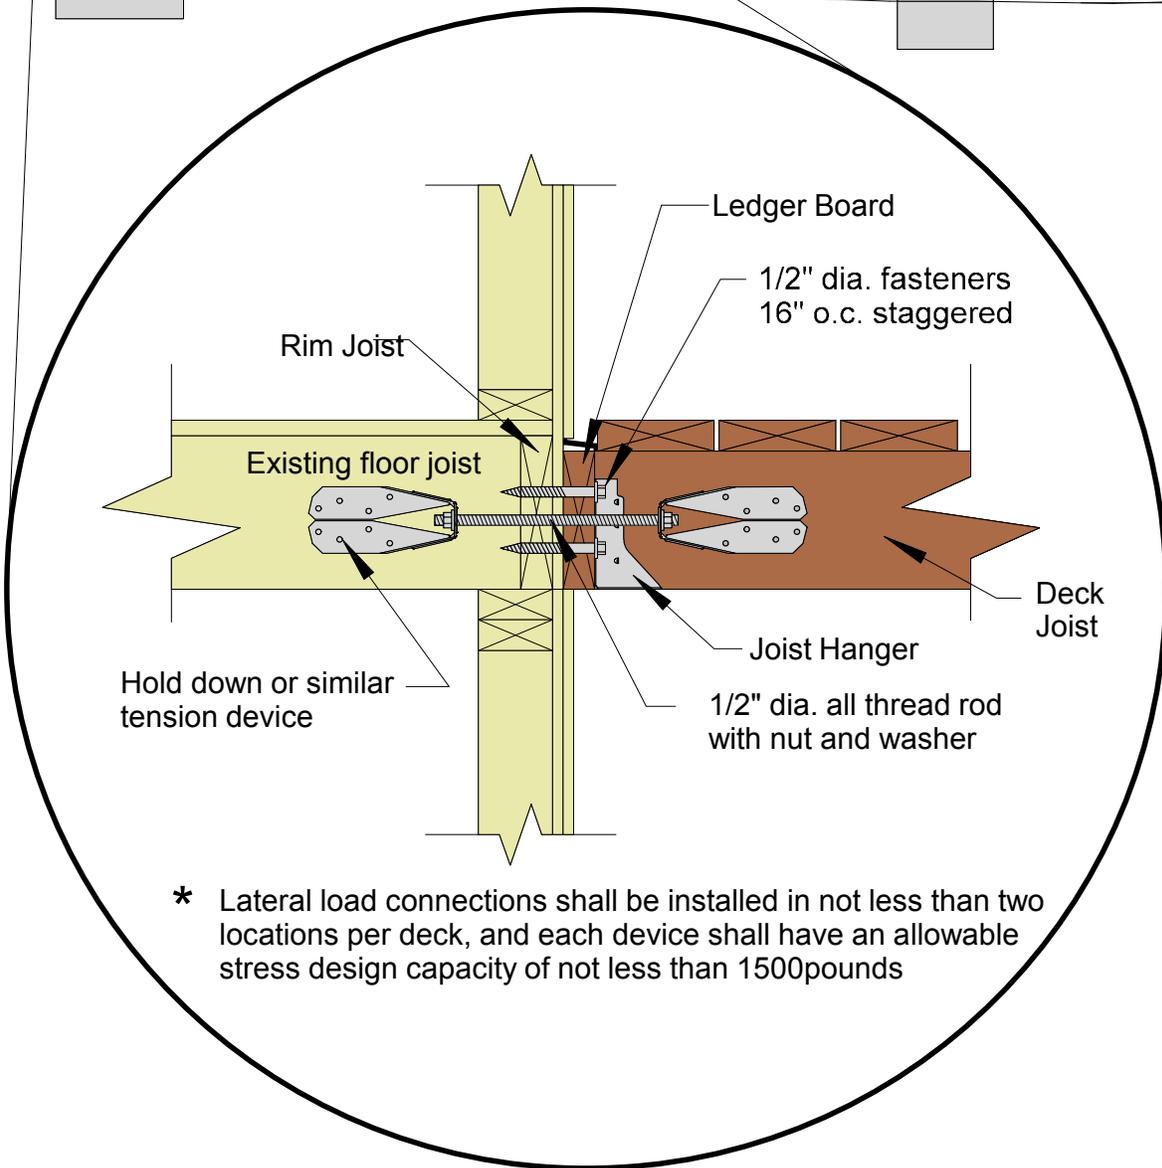

Decks (Lateral Load Attachment)

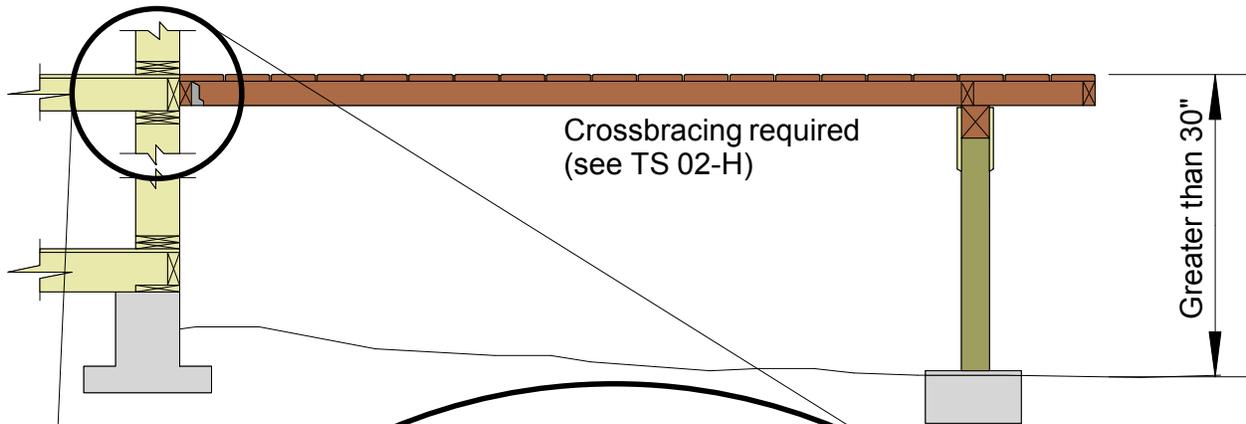

* Lateral load connections shall be installed in not less than two locations per deck, and each device shall have an allowable stress design capacity of not less than 1500pounds

Lateral Load Device Attachment for all decks over 30" in height