



NOTES:

1. PAD IS TO BE 4" THICK, 3000 PSI, REINFORCED CONCRETE.
2. CONTAINER WALLS, 3 CUBIC YARDS OR MORE, HAVING NO OPENINGS, SHALL ABUT A NON-COMBUSTIBLE WALL. CONTAINER WALLS WHICH ARE 3 CUBIC YARDS OR MORE, WITH UNPROTECTED OPENINGS, SHALL BE A DISTANCE OF 5'-0 FROM ANY COMBUSTIBLE WALL.
3. THE GATE POST SHALL BE SET RIGID WITH ADEQUATE STRENGTH TO SUPPORT THE ENTIRE LOAD OF THE GATE WITH A BASIC WIND SPEED OF 80 M.P.H. THE GATE(S) WILL BE EQUIPPED WITH THE APPROPRIATE MEANS TO HOLD GATE(S) OPEN AND CLOSED.
4. THERE SHALL BE NO OVERHEAD OBSTRUCTIONS.
5. THE LOCATION OF THE CONTAINER IS TO BE SUCH THAT SANITATION TRUCKS DO NOT HAVE TO BACK INTO CROSS TRAFFIC.
6. THE PAD SLOPE MAY NOT DEVIATE FROM THAT OF THE APPROACH BY MORE THAN 2% IN ANY DIRECTION. THE PAD MAY BE UP TO 6" HIGHER THAN THE APPROACH, BUT NOT LOWER THAN THE APPROACH.
7. RECYCLE BINS MUST BE PLACED OUTSIDE THE CONTAINER OR BE SEPARATED FROM THE DUMPSTER BY AN INTERIOR WALL AND NON CITY CONTAINERS MUST BE PLACED OUTSIDE THE CONTAINER PAD.
8. VARIOUS MATERIALS MAY BE USED FOR THE ENCLOSURE STRUCTURE, SUCH AS WOOD, MASONRY BLOCK, CHAIN LINK FENCING, ETC.
9. RAMP MUST BE SOLID MATERIAL EITHER CONCRETE OR ASPHALT.
10. WHEN SURROUNDING PAVEMENT SURFACES ARE PERVIOUS PAVEMENTS, AN IMPERVIOUS CONCRETE APPROACH SLAB SHALL BE INSTALLED UNLESS OTHERWISE APPROVED BY THE CITY ENGINEERING DIVISION OF PUBLIC WORKS.

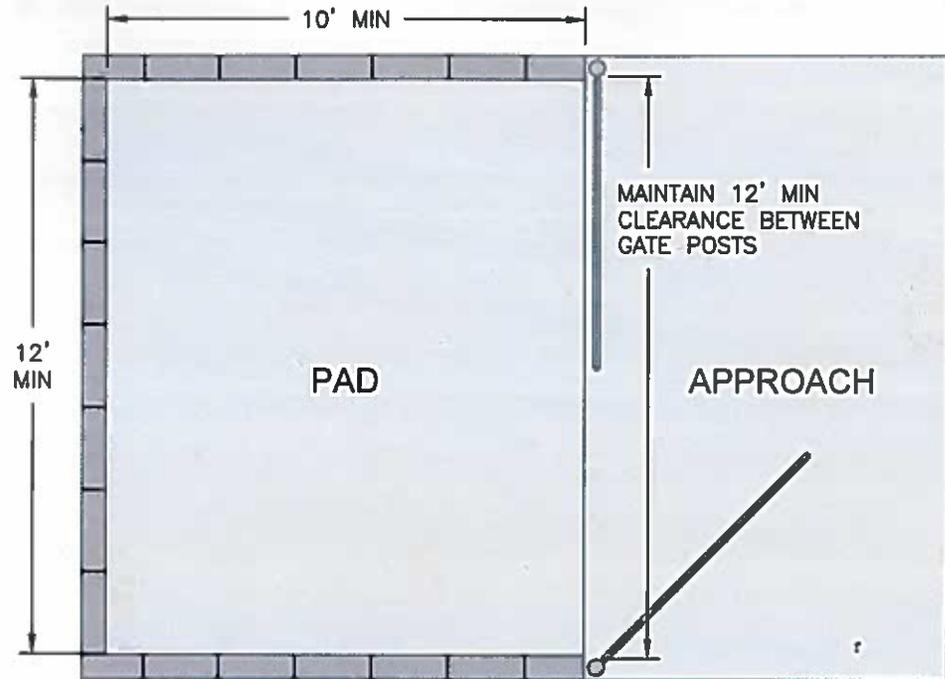

FOR ENCLOSURE MATERIAL
SEE NOTE 8

GATE(S) SHALL BE ABLE TO OPEN
TO 180°, HAVE THE ABILITY TO BE
PINNED IN THE OPEN POSITION AND
SHALL NOT BLOCK OR INFRINGE ON
ANY TRAFFIC AISLES.

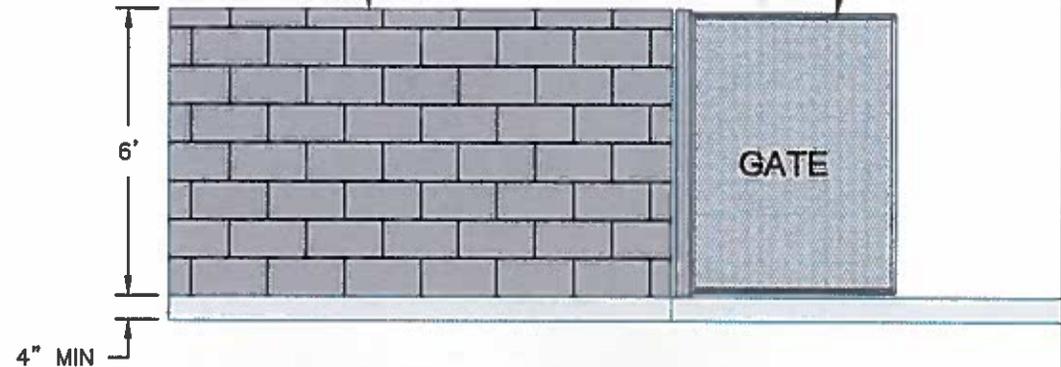

APPROVED
City of Oak Harbor
Engineering Dept.

Signature

1/28/16
Date



City of
Oak Harbor
ENGINEERING DEPARTMENT
865 SE Barrington Drive
Oak Harbor, WA 98277

**SOLID WASTE
CONTAINER
PAD DETAIL**

Solid Waste Container Pad Detail.dwg