



**NOTES:**

1. PAD IS TO BE 4" THICK, 300 PSI, REINFORCED CONCRETE.
2. CONTAINER WALLS, 3 CUBIC YARDS OR MORE, HAVING NO OPENINGS, SHALL ABUT A NON-COMBUSTIBLE WALL. CONTAINER WALLS WHICH ARE 3 CUBIC YARDS OR MORE, WITH UNPROTECTED OPENINGS, SHALL BE A DISTANCE OF 5'-0 FROM ANY COMBUSTIBLE WALL.
3. THE GATE POST SHALL BE SET RIGID WITH ADEQUATE STRENGTH TO SUPPORT THE ENTIRE LOAD OF THE GATE WITH A BASIC WIND SPEED OF 80 M.P.H. THE GATES(S) WILL BE EQUIPPED WITH THE APPROPRIATE MEANS TO HOLD GATE(S) OPEN AND CLOSED.
4. THERE SHALL BE NO OVERHEAD OBSTRUCTIONS.
5. THE LOCATION OF THE CONTAINER IS TO BE SUCH THAT SANITATION TRUCKS DO NOT HAVE TO BACK INTO CROSS TRAFFIC.
6. THE PAD SLOPE MAY NOT DEVIATE FROM THAT OF THE APPROACH BY NO MORE THAN 2% IN ANY DIRECTION. THE PAD MAY BE UP TO 6" HIGHER THAN THE APPROACH, BUT NOT LOWER THAN THE APPROACH.
7. RECYCLE BINS MUST BE PLACED OUTSIDE THE CONTAINER OR BE SEPARATED FROM THE DUMPSTER BY AN INTERIOR WALL AND NON CITY CONTAINERS MUST BE PLACED OUTSIDE THE CONTAINER PAD.
8. VARIOUS MATERIALS MAY BE USED FOR THE ENCLOSURE STRUCTURE, SUCH AS WOOD, MASONRY BLOCK, CHAIN LINK FENCING, ETC.
9. RAMP MUST BE SOLID MATERIAL EITHER CONCRETE OR ASPHALT.

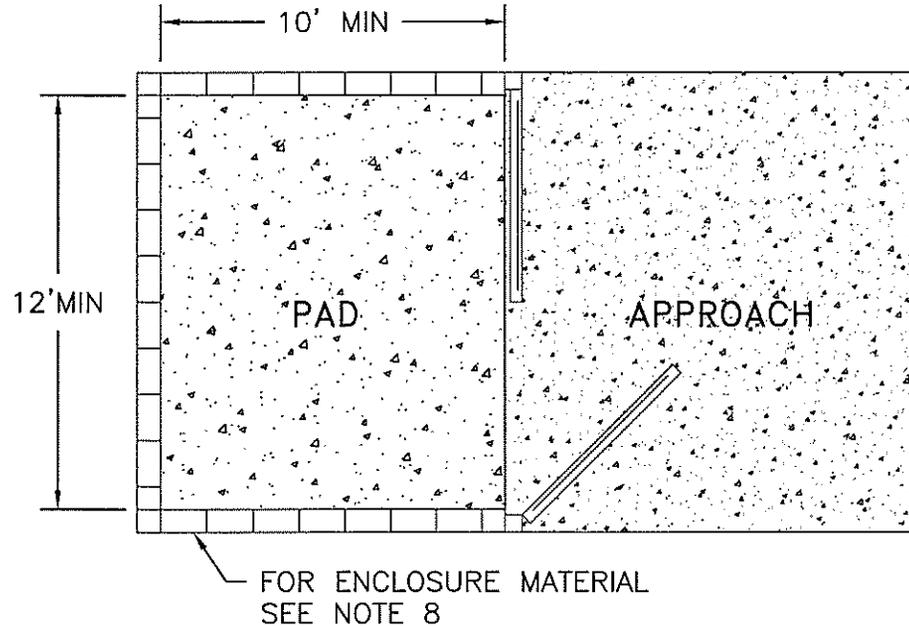

GATE(S) SHALL BE ABLE TO OPEN TO 180°, HAVE THE ABILITY TO BE PINNED IN THE OPEN POSITION AND SHALL NOT BLOCK OR INFRINGE ON ANY TRAFFIC AISLES.

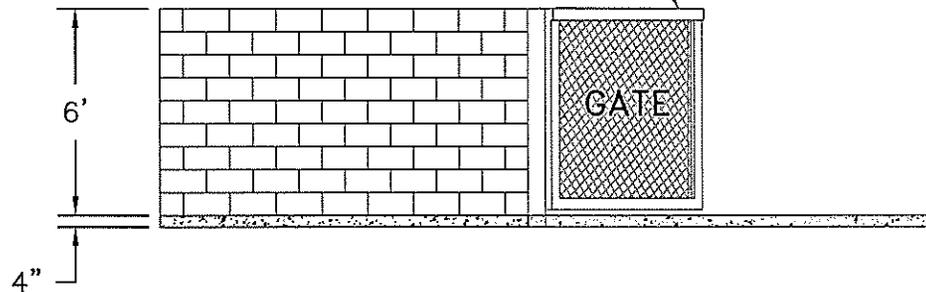

**APPROVED**  
City of Oak Harbor  
Engineering Dept.

Signature

Date

11-9-06



City of  
Oak Harbor  
ENGINEERING DEPARTMENT  
865 SE Barrington Drive  
Oak Harbor, WA 98277

SOLID WASTE  
CONTAINER  
PAD DETAIL

Solid Waste Container Pad Detail.dwg

REVISED 11-9-06